LIGHTSAVE LED

LS RECESSED DOWNLIGHT

ENSURE YOUR BUILDING IS ILLUMINATED IN EMERGENCIES WITH OUR RELIABLE RECESSED EMERGENCY DOWNLIGHTS

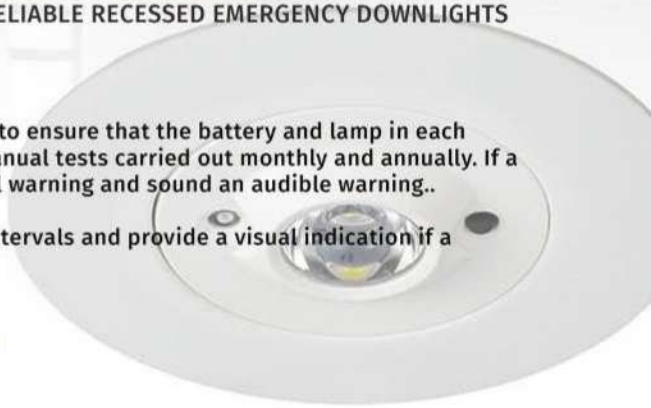

The Self-testing recessed downlights check themselves automatically to ensure that the battery and lamp in each emergency light are fully operational. The self-test feature replaces the manual tests carried out monthly and annually. If a problem is detected by the self-test the system will display a visual warning and sound an audible warning..

The recessed downlight will perform its own self-checks at regular intervals and provide a visual indication if a fault is found.

5 YEAR WARRANTY

RoHS Compliant

RECESSED DOWNLIGHT | LS-8023LCNMS

L.E.D illuminate life span is particular long

Advanced circuit design, highly efficient, low power consumption, energy conservation & environmental protection

We develop and use long-life LEDs and the extraordinary circuit in this design.

It is highly efficient and energy saving with small power consumption.

The circuit is controlled by IC with small components that includes multi-function, such as battery discharge protection, LED indicator etc, to ensures the effective performance of the fitting.

Emergency is more than 3 hours.

SPECIFICATIONS

Operating environmental temperature: 0 ~ 40°C

Operating relative humidity: less than 90%

Rated voltage: 220-240V 50/60Hz

Rated power: 2.2 W

LED: SMT 3W LED

Lumens: 200lm

Battery installed or replaced: 3.7V 2.6Ah Lithium battery

Fuse installed or replaced: 1A 250V/3.15A 250V

Recharge time: 24 hours.

LS-8023LCNMS - RECESSED DOWNLIGHT

With lens for open area

Integrated design with inverter and battery in one housing

With Lithium battery

Easy installation

LIGHTSAVE LED

Unit 91 . Court Hill House . 60 Wate Lane . Cheshire . SK9 5AJ
Tel: 01625 828 999 Web: www.lightsaveled.com Email: info@lightsaveled.com

! We reserve the right to revise or update the product specifications without notice.